
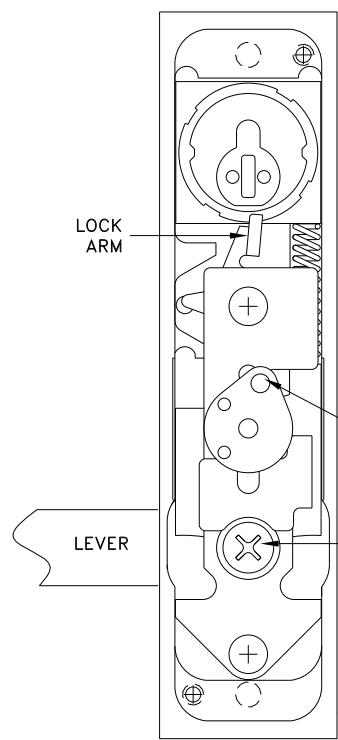


1285,2085,2086 LEVER TRIM

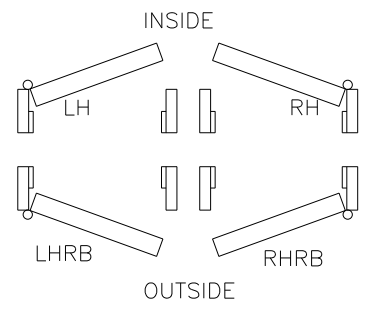

RECOMMENDED CYLINDERS AND CAMS

CYLINDER	CAM
YALE	1161-L
CORBIN	MS-4800
RUSSWIN	MS-4600
SCHLAGE	B 502-292
ILCO	4002-2R LOCKWOOD
SARGENT	47-40-101
ADAMS RITE	MS-1850

LEVER SHOWN (RHRB)

IF NECESSARY ROTATE THIS COMPONENT ANTI-CLOCKWISE TO THE POSITION SHOWN BEFORE INSTALLATION

TO CHANGE THE HAND OF THE TRIM REMOVE THIS SCREW AND REVERSE LEVER

ENSURE THAT THE CYLINDER AND CAM OPERATE THE LOCK ARM PRIOR TO INSTALLATION

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED	
DECIMAL DIMENSIONS .XX	± .010
DECIMAL DIMENSIONS .XXX	± .005
ANGULAR ± °	FRACTIONAL ± 1/64

APPROVALS	DATE
APPROVED	
CHECKED	
DRAWN	R.M., 05/11/00



3447 UNION PACIFIC AVE.
LOS ANGELES, CALIF. 90023

FILE NO.	MATERIAL
NEXT ASSY.	FINISH
QTY. USED	HEAT TREAT

SCALE FULL

OUTSIDE TRIM HANDING
SELECTION GUIDE
1285,2085,2086

SHEET 1 OF 1 SHEETS	
DWG. NO.	REV.
10-990	A