
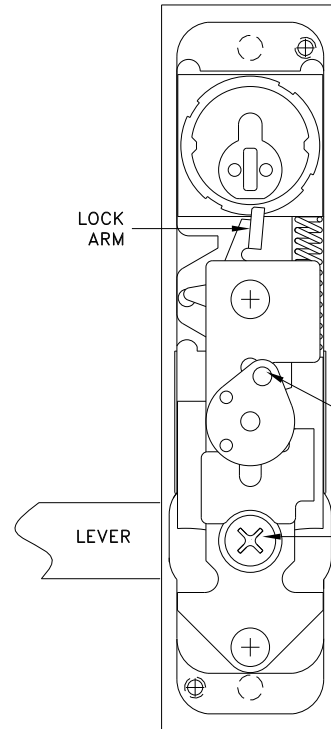


1285,2085,2086 LEVER TRIM



RECOMMENDED CYLINDERS AND CAMS

| CYLINDER | CAM |
|------------|------------------|
| YALE | 1161-L |
| CORBIN | MS-4800 |
| RUSSWIN | MS-4600 |
| SCHLAGE | B 502-292 |
| ILCO | 4002-2R LOCKWOOD |
| SARGENT | 47-40-101 |
| ADAMS RITE | MS-1850 |

LEVER SHOWN (RHRB)

IF NECESSARY ROTATE THIS COMPONENT ANTI-CLOCKWISE TO THE POSITION SHOWN BEFORE INSTALLATION

TO CHANGE THE HAND OF THE TRIM REMOVE THIS SCREW AND REVERSE LEVER

ENSURE THAT THE CYLINDER AND CAM OPERATE THE LOCK ARM PRIOR TO INSTALLATION

| | |
|---|-------------------|
| DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED | |
| DECIMAL DIMENSIONS .XX | ± .010 |
| DECIMAL DIMENSIONS .XXX | ± .005 |
| ANGULAR ± ° | FRACTIONAL ± 1/64 |

| | |
|-----------|----------------|
| APPROVALS | DATE |
| APPROVED | |
| CHECKED | |
| DRAWN | R.M., 05/11/00 |



3447 UNION PACIFIC AVE.
LOS ANGELES, CALIF. 90023

| | |
|------------|------------|
| FILE NO. | MATERIAL |
| NEXT ASSY. | FINISH |
| QTY. USED | HEAT TREAT |

| | |
|---|------|
| SCALE | FULL |
| OUTSIDE TRIM HANDING SELECTION GUIDE 1285,2085,2086 | |

| | |
|---------------------|------|
| SHEET 1 OF 1 SHEETS | |
| DWG. NO. | REV. |
| 10-990 | A |